



120W, 140W, 150W



40W, 50W, 60W





65W, 75W, 95W



180W, 200W, 220W
240W, 250W



Matte PC Cover



Dimension in Millimeters (inches)


Technical Data

Net Weight: 4.1 kg (9.0 lb)


Rated Voltage (±10%)	110V / 120V / 220V / 230V / 277V AC
Watts (±10%)	40W / 50W / 60W / 65W / 75W / 95W / 120W / 140W / 150W / 180W / 200W / 220W / 240W / 250W (250W only for green light)
Amps	0.14A~2.27A
Color of LED Light	3000K (Warm White) / 5000K (Cool White) / Green Light
Ambient Temperature	-20°C ~ +40°C
Power Factor	cos ≥ 0.9
CRI	Cool White ≥ 70 / Warm White ≥ 80
Lm / W (±10%)	120lm/w
Beam Angle	X-110° / Y-110°
Frequency	50 / 60 Hz
Degree of Protection	IP67/ NEMA 6
Material	<ul style="list-style-type: none"> Enclosure: Aluminum alloy Cover: Glass or PC (Clear / Matte)
LED Service Life	60,000 hrs
Entrance Thread	1 × NPT 3/4"

Optical Report

Polar Luminous
Intensity Distribution



Luminous
Intensity Distribution Diagram



Model Code

THT	W	2302	A	N	K	C	9	25	WHT
			①			②	③	④	⑤

① Series Type

A=With Glass
B=With Clear PC
C=With Matte PC

② C.C.T.

C=Cool White
W=Warm White
G=Green Light

③ Voltage

1=110V, 2=220V, 6=120V
9=277V, D=230V

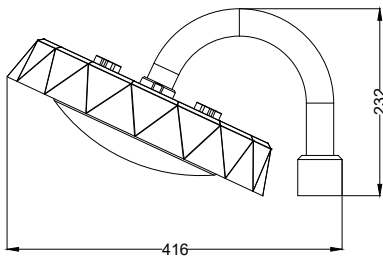
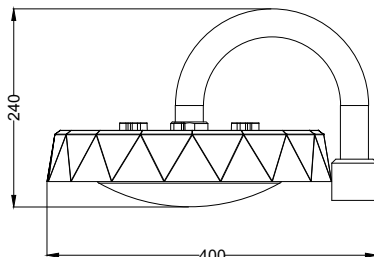


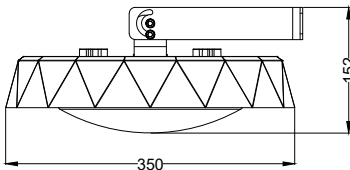
④ Wattage

D0=40W, E0=50W, F0=60W, F5=65W
G5=75W, I5=95W, L0=120W, N0=140W
P0=150W, S0=180W, U0=200W, W0=220W
Y0=240W, 25=250W

⑤ Mounting Bracket Type

WHT=Wall/Hanging Mount
S25/90=Bending Electrical Tube 25°/90°
C=Ceiling Mount
P90=Pendant Mount

Mounting Option & Dimensions (All in mm)

<p>Bending Electrical Tube 25°(S25)</p> 	<p>Bending Electrical Tube 90°(S90)</p> 
<p>Pendant Mount(P90)</p> 	<p>Ceiling Mount (C)</p> 
<p>Wall /Hanging Mount (WHT)</p> 	<p>Wall /Hanging Mount (WHT)</p> 